


NEXUS 105 / 110 / 120 XENON

Industrie – Kombialarm / Industrial AV - Unit

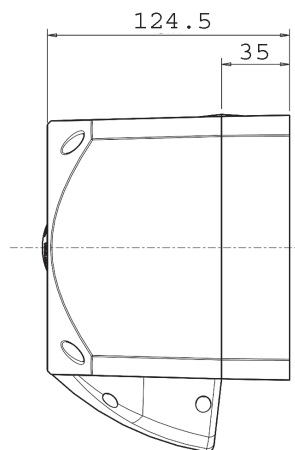

Betriebsspannung Voltage	10 - 60 VDC / 230 VAC
Stromaufnahme (Sirene) Current (Sunder)	NX 105: 8 - 40 mA NX 110: 10-50mA NX 120: 120-550 mA
Stromaufnahme (Blitz) Current (Beacon)	330mA average / 700mA peak
Lautstärke Sound Output	105 - 120 dB
Anzahl Töne Tones	64
Lautstärkeregelung Volume Control	-20 dB
Blitzfrequenz Flash Rate	1 Hz
Blitzenergie Light Output	5 Joule
Leuchtmittel Light Source	Xenon
Kalottenfarben Lens Colours	rot, gelb, grün, blau, klar red, amber, green, blue, clear
Zulassung Approval	VDS: NX 105 X G 208026 NX 110 X G 208029 NX 120 X G 208032

Betriebstemperatur Temperature	-25 / +70C
Schutzklasse Protection	IP 66
Gehäuse Construction	ABS
Gewicht Weight	0,8 - 1,8 kg
Gehäusefarbe Colours	rot red

Bestellbezeichnung / Order code's

NX 105 X-R	105dB / 10-60V
NX 110 X-R	110dB / 10-60V
NX 120 X-R	120dB / 10-60V

NX 105 -AC-X-R	230 VAC
NX 110 -AC-X-R	230 VAC
NX 120 -AC-X-R	230 VAC

R = rote Kalotte / red lens
 A = gelbe Kalotte / amber lens
 G = grüne Kalotte / green lens
 C = klare Kalotte / clear lens
 B = blaue Kalotte / blue lens