

# Industrial Rotating Beacons > **R401/400 Series**

The R401/400 series beacon is a cost effective, single stage alarm, suitable for a wide range of applications where a powerful & commanding signal is required.

It incorporates a parabolic reflector which, when energised, revolves around a continuously illuminated

APPROVALS and CONFORMITIES

lamp. This creates a powerful beam of light that sweeps through 360 degrees.


The reflector is driven by a twin belt drive system that is powered by a series wound motor for 'AC' units and a permanent magnet motor for 'DC' units. The design allows for termination inside the enclosure through the base.

# R401/400 Series > Ordering Information

Code No:	Voltage:	Light Source:	Current:	
R401-13	12v Dc	H1 x 55w	4.70 A	
R401-14	24v Dc	H1 x 70w	3.00 A	
R401-29 •	24v Dc	Ba15s x 10w	0.60 A	
R401-60	12v Dc	Ba15d x 21w	1.85 A	
R401-61 •	24v Dc	Ba15d x 21w	0.95 A	
R401-62	12v Dc	Ba15d x 48w	4.00 A	
R401-63	24v Dc	Ba15d x 48w	2.00 A	
R401-64	48v Dc	Ba15d x 35w	0.75 A	
R400-03	24v Ac ~	Ba15d x 48w	2.00 A	
R400-02	48v Ac ~	Ba15d x 35w	0.75 A	
R400-04	115v Ac ~	E14 x 60w	0.55 A	
R400-05	230v Ac ~	E14 x 60w	0.29 A	
Diode Polarised for Fire Alarm Systems				
ADD THE FOLLO	WING LENS CODES TO THE PR	ODUCT WHEN ORDERING 01	02 03 04 05	
_		0-		
<b>Kg</b> 0.98	$\sim$ 50	<b>Hz I C</b> −10+55	<b>IP</b> 65	

ROHS X CE

Visual Signals ROTATING **BEACONS** 

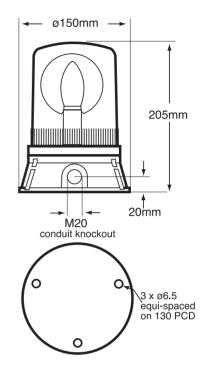

- · Continuously rated
- Suitable for surface and wall mounting
- Optional wall bracket & guard available - see accessories
- 3 point fix
- M20 conduit side entry or bottom cable entry
- Low current consumption options
- 360° light output around the vertical axis
- Dustproof and Weatherproof

UV Stable Polycarbonate Lens

UV Stable ABS Mounting Base

<b>RPM</b>	160 Dc	RF	<b>PM</b> 120 Ac
V,	FIRE		INDUSTRIAL